


Split Spherical Roller Bearing



Bearing Numbers	Boundary dimensions(mm)				Basic load rating(kN)		Abutment and fillet dimensions(mm)				Value				Weight(kg)
	d	D	B	C	Cr	Cor	r _{1, 2min}	r _{3, 4min}	d ₁	D ₁	e	Y ₁	Y ₂	Y ₀	Refer
24124CAD/W33	120	200	142	80	552	900	2	2	166	169	0.37	1.8	2.7	1.8	17
24128X3CAD/W33	140	230	102	53	368	600	2	2	180	190	0.22	3	4.6	2.8	14
23136X2CAD/W33	180	300	125	74	713	1200	2.1	2.1	220	248	0.24	2.8	4.2	2.8	30
23256CAD/W33	280	500	260	176	2710	4650	5	5	419	439	0.35	1.9	2.9	1.9	175
23160CAD/W33	300	500	240	160	2710	4900	5	5	418	434	0.3	2.3	3.4	2.2	150
23072CAD/W33	360	540	220	134	2250	4500	5	5	476	482	0.23	2.9	4.4	2.8	155
23080CAD/W33	400	600	240	148	2880	5850	5	5	522	541	0.23	2.9	4.4	2.8	205
23084CAD/W33	420	620	238	150	2880	5850	6	6	542	562	0.22	3	4.6	2.8	215
23092CAD/W33X3	460	700	245	165	3280	6550	6	6	604	635	0.21	3.2	4.8	3.2	340
241/560X3CAF1D/W33	560	870	330	200	5060	11000	6	6	733	786	0.22	3	4.6	2.8	580
241/600CAF1D/W33	600	980	515	375	10400	21600	7.5	7.5	811	833	0.35	1.9	2.9	1.8	1350

Bearing Numbers	Boundary dimensions(mm)				Basic load rating(kN)		Abutment and fillet dimensions(mm)				Value				Weight(kg)
	d	D	B	C	Cr	Cor	r _{1, 2min}	r _{3, 4min}	d ₁	D ₁	e	Y ₁	Y ₂	Y ₀	Refer
230/630CAF1D/W33	630	920	310	212	5640	12000	7.5	7.5	798	837	0.21	3.2	4.8	3.2	630
240/670CAF1D/W33	670	980	350	230	6440	14000	7.5	7.5	860	890	0.21	3.2	4.8	3.2	800
239/710CAF1D/W33X	710	950	330	180	3750	9900	6	6	882	884	0.18	3.75	5.6	3.7	581
230/710CAF1D/W33	710	1030	360	236	7020	15600	7.5	7.5	901	939	0.21	3.2	4.8	3.2	880
249/750CAF1D/W33	750	1000	360	250	6330	17000	6	6	900	916	0.22	3	4.6	2.8	710
240/750CAF1D/W33	750	1090	475	335	9950	24000	7.5	7.5	938	969	0.28	2.4	3.6	2.5	1300
249/800CAF1D/W33	800	1060	370	258	6900	18600	6	6	955	968	0.21	3.2	4.8	3.2	810
249/850CAF1D/W33	850	1120	390	272	7360	20800	6	6	1008	1028	0.22	3	4.6	2.8	830
239/850X3CAF1D/W33	850	1180	331	206	6440	17000	6	6	1070	1100	0.15	4.5	6.7	4.5	880
240/850CAF1D/W33X	850	1220	540	365	9000	24000	7.5	7.5	1070	1096	0.27	2.5	3.7	2.4	243
230/850X3CAF1D/W33	850	1280	430	280	10100	23200	7.5	7.5	1120	1177	0.2	3.4	5	3.2	1550
240/850X3CAF1D/W33	850	1280	540	375	12400	31000	7.5	7.5	1123	1147	0.26	2.6	3.9	2.5	2350
249/900CAF1D/W33	900	1180	400	280	8170	22800	6	6	1058	1086	0.21	3.2	4.8	3.2	1100
249/950CAF1D/W33	950	1250	420	300	8970	25500	7.5	7.5	1130	1150	0.21	3.2	4.8	3.2	1300
249/1060CAF1D/W33	1060.4	1400	490	335	11300	32000	7.5	7.5	1253	1285	0.21	3.2	4.8	3.2	1870
230/1060X3CAF1D/W33	1060	1460	500	335	11500	33500	7.5	7.5	1330	1350	0.2	3.4	5	3.2	2470
249/1120CAF1D/W33	1120	1460	500	335	11500	33500	7.5	7.5	1330	1350	0.2	3.4	5	3.2	2070
230/1120X3CAF1D/W33	1120	1540	525	355	14400	44000	7.5	7.5	1401	1420	0.2	3.4	5	3.2	2850
230/1250CAF1D/W33	1250	1750	560	375	19600	50000	9.5	9.5	1560	1607	0.19	3.6	5.3	3.6	3800

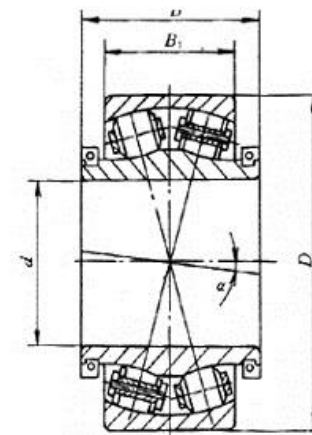

EVERGLORY INDUSTRY CO., LIMITED

No. 29 Industrial Park North Road Wafangdian City Liaoning China

www.evergloryindustry.com

info@evergloryindustry.com

Tel / Whatsapp: 008613130008503